

Teakdefend Top-Mat

Protectapeel Teakdefend Top-Mat is a weather and skid resistant protective top-mat, designed for use with Protectapeel Teakguard. The Teakdefend system is a 2 part process, using Protectapeel Teakguard as the base-coat, then the Teakdefend top-mat is applied. This system will protect teak decking and other teak surfaces for up to 9 months externally. The Teakdefend system protects against damage such as scratches, surface abrasions, spillages, overspray, dust and dirt transfer.

Colour - Teakdefend top-mat - Dark brown

Health & Safety - The Teakdefend top-mat is non-hazardous. The Protectapeel Teakguard base-coat compound is non-toxic and non-flammable in the wet state. The dry film waste may be disposed of as low hazard. Please see separate Safety Data Sheet (SDS)

Application - Apply the Protectapeel Teakguard base-coat according to its TDS, then immediately press the Teakdefend top-mat into the Protectapeel Teakguard base-coat using a dry roller.

Please see Teakdefend Application Guide for more detailed instructions.

Do not apply in wet or freezing conditions and protect from rainfall.


Repair - If the protective coating rips, repair by lifting the ripped patch and apply a fresh coat of protectapeel base-coat to the underside and reseal. Alternatively, cut away the damaged area and apply a fresh base-coat and Teakdefend Top-Mat.

Drying Time - Ensure you will receive at least 6 hours of clear weather in order for the Teakdefend system to dry adequately. Cordon off the area from foot or vehicle traffic for at least 3 hours.

Surfaces – Teak decking and other teak surfaces.

Coverage - 1m² of Teakdefend Top-mat will cover 1m². 1 kg of Protectapeel Teakguard will cover 3m² at 350 microns.

Removal - The Teakefend system can be easily removed by hand peeling. Do not remove in freezing conditions as the film may be brittle.

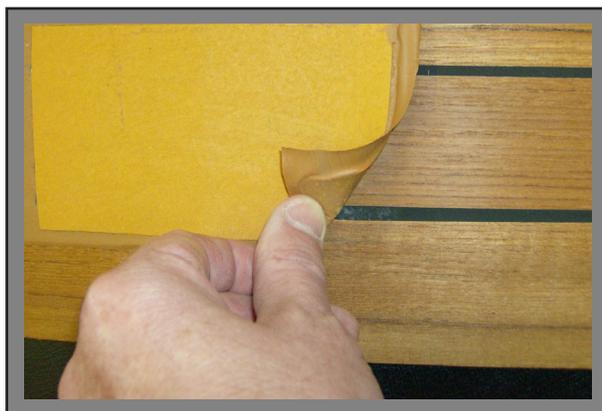

External Weather Resistance - The Teakdefend system offers protection for up to 9 months externally.

Storage - Store in a dry place away from heat and prevent from freezing.

Clean Down - Clean rollers in water immediately after use if they have come in contact with the Protectapeel Teakguard base-coat.

General Note: It is important that this product is thoroughly evaluated under production conditions before being commercially adopted (Such an evaluation should incorporate a reference to ageing). The above recommendations are made in good faith for the guidance of users and are without liability. Any queries should be referred to our Technical Sales Department.